


Cement Marble Nero Ebano

Color:

Black

Finishes available:

SANDBLASTED
BRUSHED
HONED
POLISHED

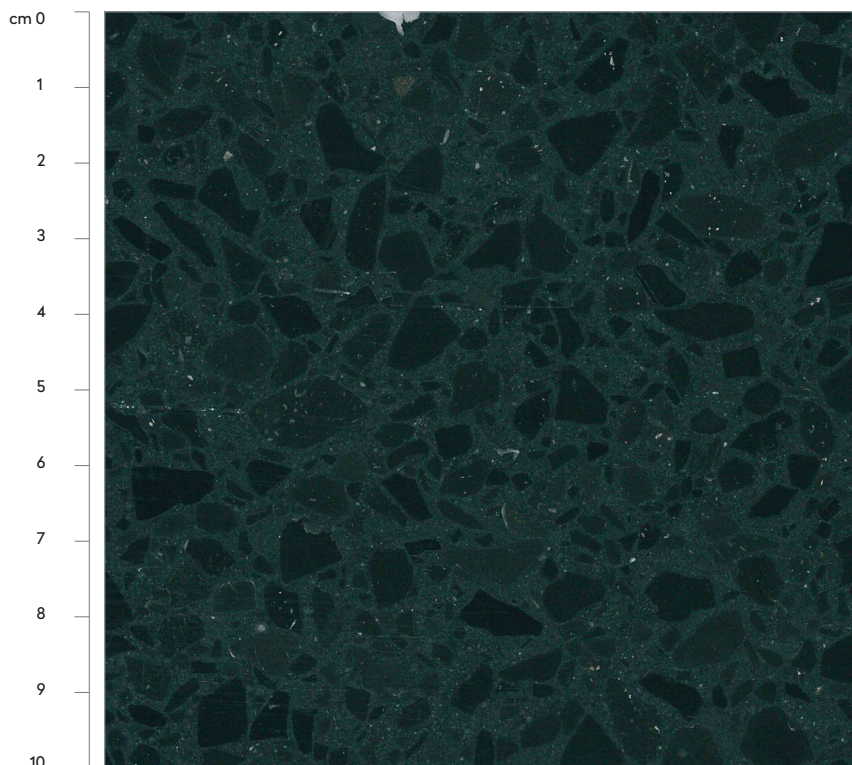

CHARACTERISTICS

	STANDARD	UNIT	RANGE OF VALUES	
DIMENSIONAL REQUIREMENTS Dimensional deviations Straightness of edges Flatness of the upper face	EN 13748-1:2005	-	Thickness: $\leq \pm 3$ mm Rect. & orthog. Edges: $\leq \pm 0,3\%$ Flatness: $\leq 0,3\%$	
DENSITY	EN 14617-1:2005	kg/dm ³	2,40 – 2,60	
WATER ABSORPTION	EN 14617-1:2005	W24h	0,24 – 0,30 g/cm ²	
		Wm,a	5,16 – 6,85 %	
BREAKING STRENGTH AND BREAKING LOAD	EN 13748-1:2005	Pm	3,1 – 3,5 kN	
		Tm	7,7 – 8,8 MPa	
COMPRESSIVE STRENGTH	EN 14671-15	N/mm ²	70 – 100	
ABRASION RESISTANCE	EN 13478-1:2005	mm	> 24	
SLIP/SKID RESISTANCE	EN 13478-1:2005	SRV dry	Honed 400	47 – 49
		SRV wet		14 – 20
COMBUSTION REACTION	EN 13501-1	Class	A1	

STANDARD-ITEMS

BLOCK SIZE	305 × 124 × 80 cm	
SLAB SIZE	305 × 124 cm	Thickness 2-3-4, 2+2, 3+3 cm
FLOORTILES SIZE	60 × 30 cm	Thickness 2-3-4 cm
	30 × 30 cm	
	40 × 40 cm	
	60 × 60 cm	
CUT TO SIZE DIMENSIONS	2-3-4-2+2, 3+3 cm	
SKIRTING SIZE	7,3 × 1 cm	
SPECIAL SIZE AND THICKNESS UPON REQUEST		

WEIGHTS

Weight thickness 1,2 cm	31 kg/m ²
Weight thickness 2 cm	50 kg/m ²
Weight thickness 3 cm	75 kg/m ²
Weight thickness 4 cm	100 kg/m ²
Weight thickness 2+2 cm	100 kg/m ²
Weight thickness 3+3 cm	150 kg/m ²
Weight skirting	1,8 kg/m ²

EUSTONE S.r.l.

Head Office: Via Roma, 96 - 37023 Grezzana (VR)
Production Dept: Via Domenico da Lugo, 42 - 37023 Lugo di Grezzana (VR)
Tel. +39 045 8802175 - Fax +39 045 8819442



EN 13748-1:2005