


Resin Marble New Marfil

Color:
Beige

Finishes available:

SANDBLASTED
BRUSHED
HONED
POLISHED

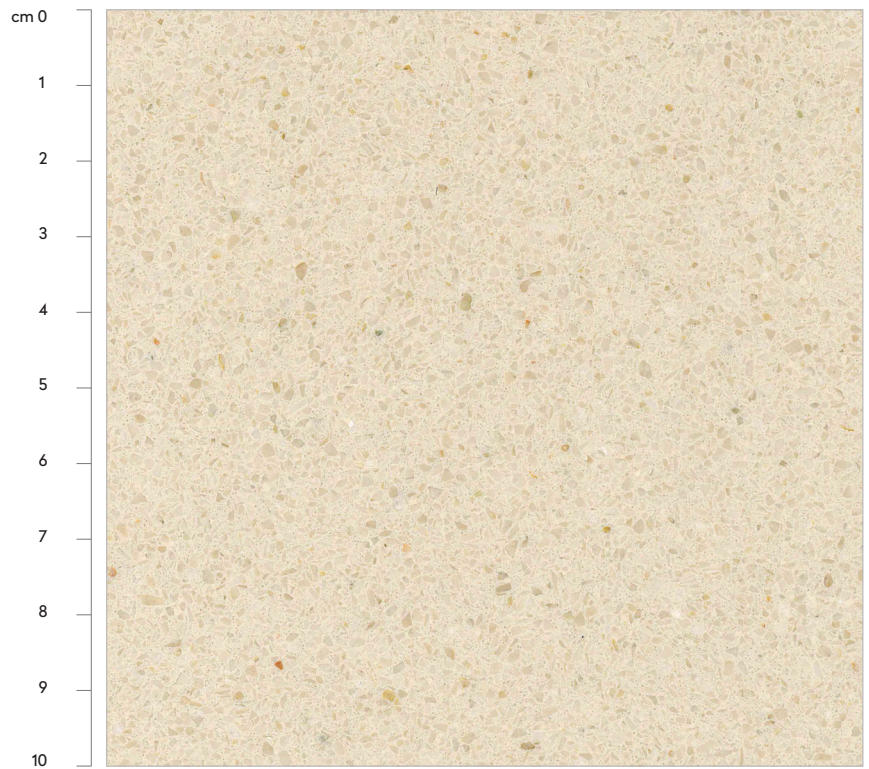

CHARACTERISTICS

	STANDARD	UNIT	RANGE OF VALUES	
DENSITY	EN 14617-1:2005	Kg/dm ³	2,40 – 2,60	
WATER ABSORPTION	EN 14617-1:2005	% (Volume)	< 0,2	
BREAKING STRENGTH AND BREAKING LOAD	EN 14617-2:2008	MPa	11,5 – 24,6	
COMPRESSIVE STRENGTH	EN 14671-15	MPa	90 – 120	
ABRASION RESISTANCE	EN 14617-4:2012	mm	34,5 - 36	
COEFFICIENT OF LINEAR THERMAL EXPANSION	EN 14617-11:2005	m/m°C	14 – 24 x 10 ⁻⁶	
SLIP/SKID RESISTANCE	EN 14321:2004	SRV dry	Polished	41 – 49
		SRV wet		4 – 8
COMBUSTION REACTION	EN 13501-1	-	A2 fl S1	
IMPACT RESISTANCE	EN 14617-9:2005	W (J)	1 – 2	
RESISTANCE TO CHEMICALS	EN 14617-10:2012	Class	C1	
DIMENSION STABILITY	EN 14617-12:2012	Class	A	

STANDARD-ITEMS

BLOCK SIZE	305 × 124 × 80 cm	
SLAB SIZE	305 × 124 cm	Thickness 2-3-4, 3+3 cm
FLOOR TILES SIZE	60 × 30 cm	Thickness 1,2 cm
	30 × 30 cm	
	40 × 40 cm	
	60 × 60 cm	
CUT TO SIZE DIMENSIONS	2-3, 3+3 cm	
SKIRTING SIZE	7 × 1 cm	
SPECIAL SIZE AND THICKNESS UPON REQUEST		

WEIGHTS

Weight thickness 1,2 cm	31 kg/m ²
Weight thickness 2 cm	50 kg/m ²
Weight thickness 3 cm	75 kg/m ²
Weight thickness 4 cm	100 kg/m ²
Peso 2+2 cm	100 kg/m ²
Peso 3+3 cm	150 kg/m ²
Weight skirting	1,8 kg/m ²

EUSTONE S.r.l.

Head Office: Via Roma, 96 - 37023 Grezzana (VR)
Production Dept.: Via Domenico da Lugo, 42 - 37023 Lugo di Grezzana (VR)
Tel. +39 045 8802175 - Fax +39 045 8819442



EN 15285:2008