


## Resin Marble White Iceberg

**Color:**  
White

**Finishes available:**

SANDBLASTED  
BRUSHED  
HONED  
POLISHED

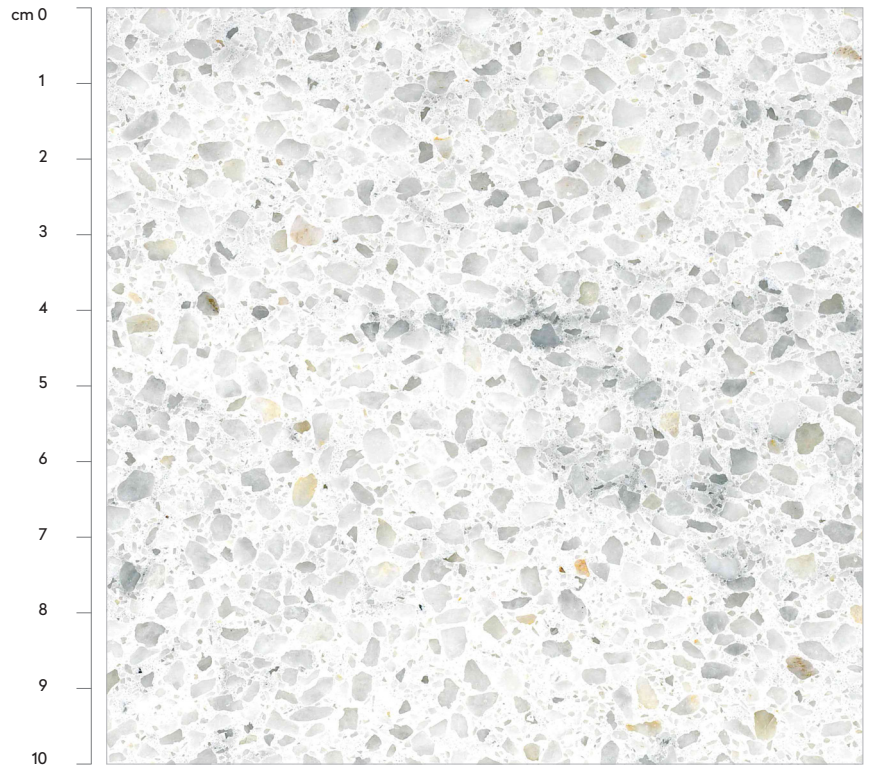

## CHARACTERISTICS

	STANDARD	UNIT	RANGE OF VALUES	
DENSITY	EN 14617-1:2005	Kg/dm <sup>3</sup>	2,40 – 2,60	
WATER ABSORPTION	EN 14617-1:2005	% (Volume)	< 0,2	
BREAKING STRENGTH AND BREAKING LOAD	EN 14617-2:2008	MPa	11,5 – 24,6	
COMPRESSIVE STRENGTH	EN 14671-15	MPa	90 – 120	
ABRASION RESISTANCE	EN 14617-4:2012	mm	34,5 - 36	
COEFFICIENT OF LINEAR THERMAL EXPANSION	EN 14617-11:2005	m/m°C	14 – 24 x 10 <sup>-6</sup>	
SLIP/SKID RESISTANCE	EN 14321:2004	SRV dry	Polished	41 – 49
		SRV wet		4 – 8
COMBUSTION REACTION	EN 13501-1	-	A2 fl S1	
IMPACT RESISTANCE	EN 14617-9:2005	W (J)	1 – 2	
RESISTANCE TO CHEMICALS	EN 14617-10:2012	Class	C1	
DIMENSION STABILITY	EN 14617-12:2012	Class	A	

## STANDARD-ITEMS

BLOCK SIZE	305 × 124 × 80 cm	
SLAB SIZE	305 × 124 cm	Thickness 2-3-4, 3+3 cm
FLOOR TILES SIZE	60 × 30 cm	Thickness 1,2 cm
	30 × 30 cm	
	40 × 40 cm	
	60 × 60 cm	
CUT TO SIZE DIMENSIONS	2-3, 3+3 cm	
SKIRTING SIZE	7 × 1 cm	
SPECIAL SIZE AND THICKNESS UPON REQUEST		

## WEIGHTS

Weight thickness 1,2 cm	31 kg/m <sup>2</sup>
Weight thickness 2 cm	50 kg/m <sup>2</sup>
Weight thickness 3 cm	75 kg/m <sup>2</sup>
Weight thickness 4 cm	100 kg/m <sup>2</sup>
Peso 2+2 cm	100 kg/m <sup>2</sup>
Peso 3+3 cm	150 kg/m <sup>2</sup>
Weight skirting	1,8 kg/m <sup>2</sup>