


Resin Marble Breccia Oniciata

Color:
Beige

Finishes available:

SANDBLASTED
BRUSHED
HONED
POLISHED

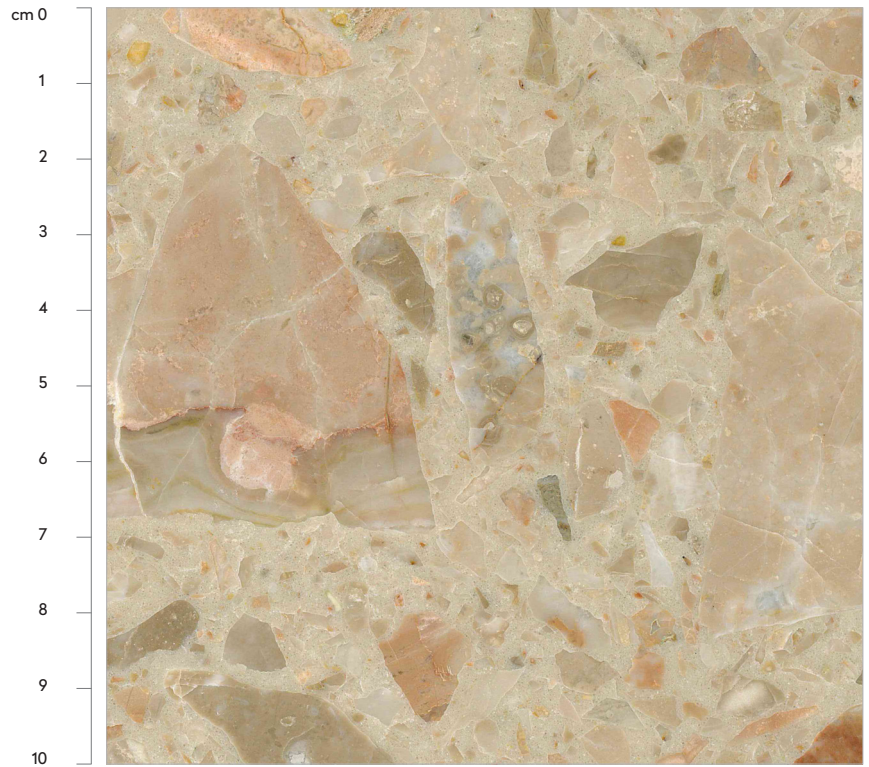

CHARACTERISTICS

| | STANDARD | UNIT | RANGE OF VALUES | |
|---|------------------|--------------------|----------------------------|---------|
| DENSITY | EN 14617-1:2005 | Kg/dm ³ | 2,40 – 2,60 | |
| WATER ABSORPTION | EN 14617-1:2005 | % (Volume) | < 0,2 | |
| BREAKING STRENGTH AND BREAKING LOAD | EN 14617-2:2008 | MPa | 11,5 – 24,6 | |
| COMPRESSIVE STRENGTH | EN 14671-15 | MPa | 90 – 120 | |
| ABRASION RESISTANCE | EN 14617-4:2012 | mm | 34,5 - 36 | |
| COEFFICIENT OF LINEAR THERMAL EXPANSION | EN 14617-11:2005 | m/m°C | 14 – 24 x 10 ⁻⁶ | |
| SLIP/SKID RESISTANCE | EN 14321:2004 | SRV dry | Polished | 41 – 49 |
| | | SRV wet | | 4 – 8 |
| COMBUSTION REACTION | EN 13501-1 | - | A2 fl S1 | |
| IMPACT RESISTANCE | EN 14617-9:2005 | W (J) | 1 – 2 | |
| RESISTANCE TO CHEMICALS | EN 14617-10:2012 | Class | C1 | |
| DIMENSION STABILITY | EN 14617-12:2012 | Class | A | |

STANDARD-ITEMS

| | | |
|---|-------------------|----------------------------|
| BLOCK SIZE | 305 × 124 × 80 cm | |
| SLAB SIZE | 305 × 124 cm | Thickness 2-3-4, 3+3 cm |
| FLOOR TILES SIZE | 60 × 30 cm | Thickness 1,2 cm |
| | 30 × 30 cm | |
| | 40 × 40 cm | |
| | 60 × 60 cm | |
| CUT TO SIZE DIMENSIONS | 2-3, 3+3 cm | |
| SKIRTING SIZE | 7 × 1 cm | |
| SPECIAL SIZE AND THICKNESS UPON REQUEST | | |

WEIGHTS

| | |
|-------------------------|-----------------------|
| Weight thickness 1,2 cm | 31 kg/m ² |
| Weight thickness 2 cm | 50 kg/m ² |
| Weight thickness 3 cm | 75 kg/m ² |
| Weight thickness 4 cm | 100 kg/m ² |
| Peso 2+2 cm | 100 kg/m ² |
| Peso 3+3 cm | 150 kg/m ² |
| Weight skirting | 1,8 kg/m ² |